
Einstechen (außen)
Grooving (external)


Klemmhalter
Toolholder

360C
mit Kassette
wtih cassette

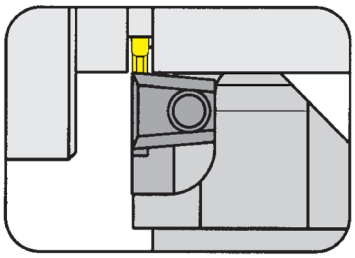

Stechtiefe bis Spannbereich	Depth of groove up to Clamping range	6 mm 0,5-2,9 mm

mit innerer Kühlmittelzufuhr
with through coolant supply

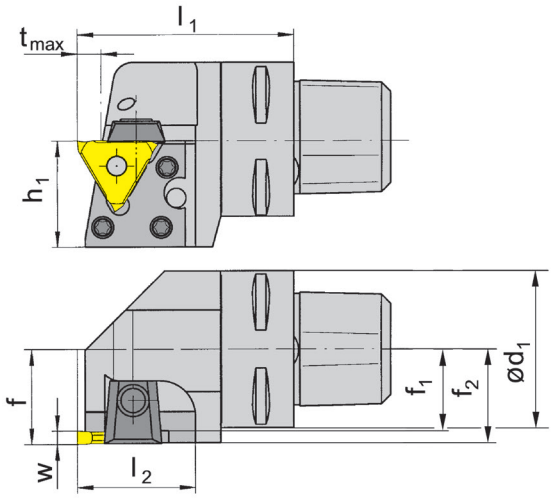

für Wendeschneidplatte
Ifor ndexable insert

Typ	312
Type	S312

R = rechts wie gezeichnet
R = right hand version shown

L = links spiegelbildlich
L = left hand version

Bestellnummer Part number	l_1	l_2	h_1	d_1	f_1	f	f_2	t_{max}	Größe Size	Spannbereich Clamping range
R/L360.00C3.K1	45	31	27,3	32	15,0	f_1+w-a_1	16,5	4	01	0,5-1,9
R/L360.00C4.K1	50	31	27,3	40	19,0	f_1+w-a_1	20,5	4	01	0,5-1,9
R/L360.00C5.K1	50	31	27,3	50	24,0	f_1+w-a_1	25,5	4	01	0,5-1,9
R/L360.00C6.K1	55	31	31,5	63	30,5	f_1+w-a_1	32,0	4	01	0,5-1,9
R/L360.00C3.K2	45	31	27,3	32	14,0	f_1+w-a_1	16,5	6	02	1,9-2,9
R/L360.00C4.K2	50	31	27,3	40	18,0	f_1+w-a_1	20,5	6	02	1,9-2,9
R/L360.00C5.K2	50	31	27,3	50	23,0	f_1+w-a_1	25,5	6	02	1,9-2,9
R/L360.00C6.K2	55	31	31,5	63	29,5	f_1+w-a_1	32,0	6	02	1,9-2,9

Ausführung R oder L angeben
State R or L version

w, a_1 siehe WSP
w, a1 see indexable inserts

Abmessungen in mm
Dimensions in mm

Weitere Abmessungen auf Anfrage
Further sizes upon request

Das Anzugsdrehmoment der Schrauben finden Sie in den Technischen Hinweisen.
For torque specification of the screw, please see Technical Instructions.

Ersatzteile
Spare Parts

Klemmhalter Toolholder	**Kassette** Cassette	**Spannelement** Clamp	**Inbus-Schlüssel** Wrench	**Schraube** Srew	**TORX PLUS®-Schlüssel** TORX PLUS® Wrench
L360.00C...K1	**LK360.00.01**	**16.4**	**SW3,0 DIN911**	**030.0410.T15P**	**T15PQ**
R360.00C...K1	**RK360.00.01**	**16.4**	**SW3,0 DIN911**	**030.0410.T15P**	**T15PQ**
L360.00C...K2	**LK360.00.02**	**16.4**	**SW3,0 DIN911**	**030.0410.T15P**	**T15PQ**
R360.00C...K2	**RK360.00.02**	**16.4**	**SW3,0 DIN911**	**030.0410.T15P**	**T15PQ**