

Einstechen und Längsdrehen (außen)
Grooving and Side Turning (external)

Grundhalter
Basic toolholder

218
mit auswechselbarer Kassette
with changeable cassette

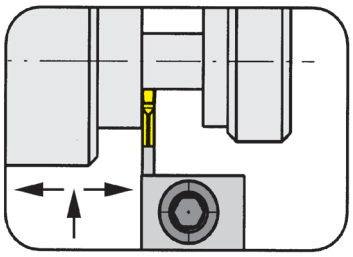

Stechtiefe bis Spannbereich	Depth of groove up to Clamping range	18 mm 3-8 mm

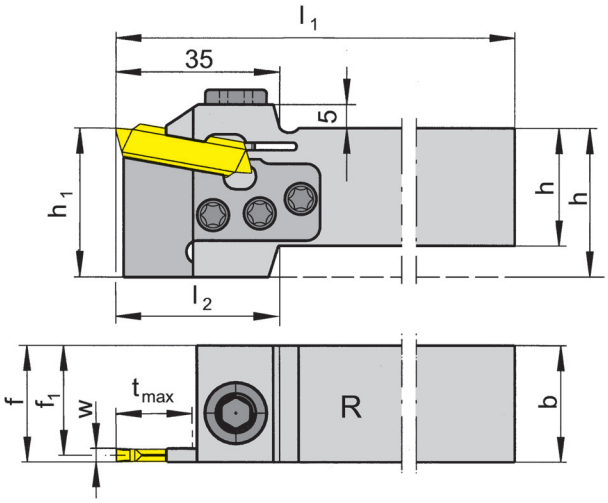

für Wendeschneidplatte
for Indexable insert

Typ Type	229 S229 N229

R = rechts wie gezeichnet
R = right hand version shown

L = links spiegelbildlich
L = left hand version

Bestellnummer Part number	h	b	l_1	l_2	h_1	f_1	f	t_{max}	Größe Size	Spannbereich Clamping range
R/L218.2525.K3	25	25	150	35	32	23,55	f_1+w/2	18	03	3,0-4,0
R/L218.3225.K3	32	25	170	-	32	23,55	f_1+w/2	18	03	3,0-4,0
R/L218.2525.K4	25	25	150	35	32	22,70	f_1+w/2	18	04	4,0-5,0
R/L218.3225.K4	32	25	170	-	32	22,70	f_1+w/2	18	04	4,0-5,0
R/L218.2525.K5	25	25	150	35	32	22,20	f_1+w/2	18	05	5,1-6,0
R/L218.3225.K5	32	25	170	-	32	22,20	f_1+w/2	18	05	5,1-6,0
R/L218.2525.K7	25	25	150	35	32	21,20	f_1+w/2	18	07	6,1-8,0
R/L218.3225.K7	32	25	170	-	32	21,20	f_1+w/2	18	07	6,1-8,0

Ausführung R oder L angeben
State R or L version

w siehe WSP
w see indexable inserts

Abmessungen in mm
Dimensions in mm

Weitere Abmessungen auf Anfrage
Further sizes upon request

Das Anzugsdrehmoment der Schrauben finden Sie in den Technischen Hinweisen.
For torque specification of the screw, please see Technical Instructions.

H

Ersatzteile
Spare Parts

Grundhalter Basic toolholder	**Spannschraube** Clamping Screw	**Inbus-Schlüssel** Allen Wrench	**Kassette** Cassette	**TORX PLUS®-Schlüssel** TORX PLUS® Wrench
R/L218...K3	**030.0518T20P**	**SW6,0 DIN911**	**NK218.32.03**	**T20PQ**
R/L218...K4	**030.0518T20P**	**SW6,0 DIN911**	**NK218.32.04**	**T20PQ**
R/L218...K5	**030.0518T20P**	**SW6,0 DIN911**	**NK218.32.05**	**T20PQ**
R/L218...K7	**030.0518T20P**	**SW6,0 DIN911**	**NK218.32.07**	**T20PQ**